



No.2  
2020



# DSA1000A series Spectrum Analyzer

- 9 kHz to 3 GHz Frequency Range
- -148 dBm Displayed Average Noise Level (DANL)
- -88 dBc/Hz@10 kHz Phase Noise (typ.)
- Total Amplitude Uncertainty <1.0 dB
- 10 Hz Minimum Resolution Bandwidth (RBW)
- Standard with Preamplifier
- 3 GHz Tracking Generator (optional)
- Breadth of measurement functions and automatic settings provide ultimate flexibility
- 8.5 inch widescreen display with clear, vivid, and easy to use graphical interface
- Complete connectivity with standard interfaces such as LAN,USB Host,USB Device,VGA and optional GPIB
- Compact size, light weight(13.7lbs)

DSA1000A series is one of RIGOL's compact size,light weight economic spectrum analyzers, the digital IF technology guarantees its reliability and performance to meet the most demanding RF applications.

## Unique widescreen display, friendly interface and easy-to-use operations

The LCD display is an 8.5 inch widescreen with 800 x 480 high resolution and fine spectral lines for displaying large data sets (601 display points in normal and 751 points in full screen mode)

Special menu design keeps many of the operation menus in the same interface without paging

Clear keyboard division and button layout bring better usability to the instrument

One-key for saving results

common shortcut key design including L-Peak and R-Peak enhance your working efficiency

designed with broad uses in mind, the knob gives users more freedom with parameter modification and cursor positioning



## Advanced Performance and stability


Stability and precision is the primary design goal of the Series DSA1000A. We started with an all digital IF core. With the minimum 10Hz resolution bandwidth, -88 dBc/Hz phase noise (typical) at 10 kHz offset, up to -148 dBm displayed average noise level (10 Hz RBW, standard preamplifier on) and less than 1.0 dB total amplitude error, the Series DSA1000A makes high precision measurements easier than ever whether the application calls for low noise or narrow resolution.

## Breadth of measurement functions and automatic settings provide ultimate flexibility

DSA1000A provides a series of automatic setting functions such as Auto Tune, Auto Range, Auto Scale and Auto Couple that enable the analyzer to acquire signals and match parameters automatically, instead of the manual process used by a traditional analyzer. In addition, the User and Factory settings under the Preset function enable users to quickly and easily recall previous measurement settings.


## Incomparable Value

With the Series DSA1000A get a high quality spectrum analyzer without the price tag. This lowers the investment whether you are in stages related to research and development or manufacturing and maintenance. Don't let instrumentation costs dictate resource allocation. With our available calibration and maintenance training as well as firmware updates never regret a purchase because of total cost of ownership.

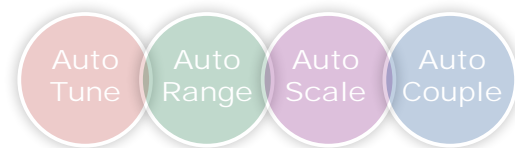

## Benefits of Rigol's all digital IF design

1. The ability to measure smaller signals: on the basis of this technology, the IF filter enables smaller bandwidth settings, which greatly reduce the displayed average noise level.
2. The ability to distinguish between small signals by frequency: using the IF filter with the smallest bandwidth setting it is possible to make out signals with a frequency difference of only 10 Hz.
3. High precision amplitude readings: this technology almost eliminates the errors generated by filter switching, reference level uncertainty, scale distortion, as well as errors produced in the process of switching between logarithmic and linear display of amplitude when using a traditional analog IF design.
4. Higher reliability: compared with traditional analog designs, the digital IF greatly reduces the complexity of the hardware, the system instability caused by channel aging, and the temperature sensitivity that can contribute to parts failure.
5. High measurement speed: the use of digital IF technology improves the bandwidth precision and selectivity of the filter, minimizing the scanning time and improving the speed of the measurement.

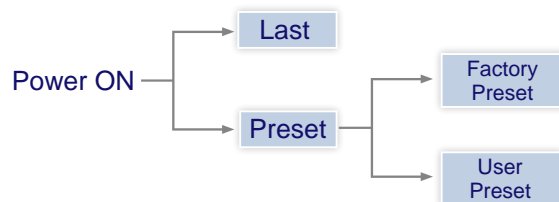



Status saving and loading such as

- Setup
- State
- Trace
- Corrections
- Measure
- Marker Table
- Peak Table
- Limit

## Breadth of measurement functions enhance value:

The DSA1000A series has many standard advanced measurement functions, including Time domain Power, Channel Power, Adjacent-channel Power, Occupied Bandwidth, Carrier to Noise Ratio, Harmonic Distortion, Intermodulation Distortion, Pass/Fail, Frequency Count, N dB,

Noise Marker and so on, to meet the requirements of a broad set of user's measurements. In addition, the DSA PC Software(Ultra Spectrum) could provide more analysis and display functions such as the waterfall curves to expand the measurement capabilities to even more applications.

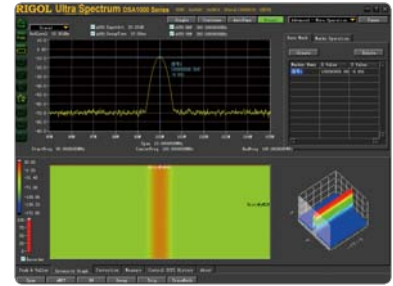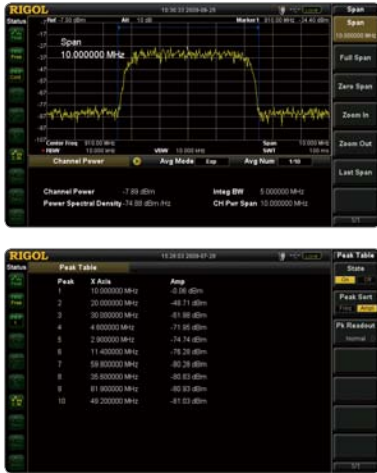

## Flexible connectivity

With the available interfaces for the Series DSA1000A, remote control is easy through USB, LAN, or GPIB. Integrate a test system quickly with standard SCPI commands.

## Compact and rugged design

The compact and rugged design makes the Series DSA1000A ideal for many portable and field applications. Spot tests are easier than ever with a small, light weight analyzer, easy carry system, and extra storage space (nonvolatile memory) onboard as well as the ability to store data directly to a USB flash device.



<b>USB host</b>	USB host is available to use a USB flash device to save the instrument settings and history data as well as for firmware updates
<b>USB device</b>	USB device is available for printing with a PictBridge printer, or to connect as a TMC instrument
<b>LAN</b>	LXI-C is standard and support for VISA control over ethernet is included
<b>GPIB</b>	Add a GPIB port with a USB-GPIB module (optional)
<b>VGA</b>	Connection for extending screen to an external monitor is provided for demonstrations and training

## ► Specifications

Specifications are valid after 30 minute warm up time with a valid calibration.

### Frequency

<b>Frequency</b>		
Frequency Range	DSA1030A	9 kHz to 3 GHz
Frequency Resolution		1 Hz
<b>Internal Frequency Reference</b>		
Reference Frequency		10 MHz
Aging Rate		<3 ppm/year
Temperature Drift	20°C to 30°C	<3 ppm
<b>Frequency Readout Accuracy</b>		
Marker Resolution		span/(sweep points-1)
Marker Uncertainty		±(frequency indication × frequency reference uncertainty + 1% × span + 10% × resolution bandwidth + marker resolution)
<b>Marker Frequency Counter</b>		
Resolution		1 Hz, 10 Hz, 100 Hz, 1 KHz, 10 KHz, 100 KHz
Uncertainty		± (frequency indication × frequency reference uncertainty + counter resolution)

Note: Frequency Reference Uncertainty = (aging rate × period since adjustment + temperature drift).

<b>Frequency Span</b>		
Range	DSA1030A	0 Hz, 100 Hz to 3 GHz
Uncertainty		±span / (sweep points-1)

<b>SSB phase noise</b>		
Carrier Offset	10 kHz	<-88 dBc/Hz, typical
	100 kHz	<-100 dBc/Hz, typical
	1 MHz	<-110 dBc/Hz, typical

Note: typical  $f_c$  = 500 MHz, RBW ≤ 1 kHz, sample detector, and trace average ≥ 50.

<b>Bandwidths</b>		
Resolution Bandwidth (-3 dB)		10 Hz to 1 MHz, in 1-3-10 sequence
RBW Uncertainty		< 5%, nominal
Resolution Filter Shape Factor (60 dB: 3 dB)		< 5, nominal
Video Bandwidth (-3 dB)		1 Hz to 3 MHz, in 1-3-10 sequence

### Amplitude

<b>Measurement Range</b>		
Range		DANL to +30 dBm
<b>Maximum rated input level</b>		
DC Voltage		50 V
CW RF Power	RF attenuation ≥ 20 dB	30 dBm (1W)
Max. Damage Level		40 dBm (10W)

Note: when input level > 33 dBm, the protection switch will be on.

<b>1dB gain compression</b>		
Total power at input mixer	$f_c \geq 50$ MHz, preamplifier off	>0 dBm

Note: Mixer power level (dBm) = input power (dBm) – input attenuation (dB).

Displayed Average Noise Level (DANL)		
0 dB RF Attenuation, RBW=VBW=10Hz, Sample Detector, Trace Average ≥ 50		
DANL (Preamplifier Off)	100 kHz to 10 MHz	<-85 dBm-3 × (f/1 MHz)dB, typ. -125 dBm
	10 MHz to 2.5 GHz	<-127 dBm+3 × (f/1 GHz)dB, typ. -130 dBm
	2.5 GHz to 3 GHz	<-115 dBm
DANL (Preamplifier On)	100 kHz to 1 MHz	<-103 dBm
	1 MHz to 10 MHz	<-103 dBm-3 × (f/1 MHz)dB, typ. -143 dBm
	10 MHz to 2.5 GHz	<-145 dBm+3 × (f/1 GHz)dB, typ. -148 dBm
	2.5 GHz to 3 GHz	<-133 dBm

Level Display		
Logarithmic Level Axis		1 dB to 200 dB
Linear Level Axis		0 to Reference Level
Number of Display Points	Normal	601
	Full Screen	751
Number of Traces		3 + Math trace
Trace Detectors		Normal, Positive-peak, Negative-peak, Sample, RMS, Voltage Average
Trace Functions		Clear Write, Max Hold, Min Hold, Average, Freeze, Blank
Units of Level Axis		dBm, dBmV, dBμV, V, W

Frequency Response		
10 dB RF attenuation, relative to 50 MHz, 20°C to 30°C		
Frequency Response (Preamplifier Off)	100 kHz to 3 GHz	<0.7 dB
Frequency Response (Preamplifier On)	1 MHz to 3 GHz	<1.0 dB
Input Attenuation Switching Uncertainty		
Setting Range		0 to 50 dB, in 1 dB step
Switching Uncertainty	fc=50 MHz, relative to 10dB, 20°C to 30°C	< (0.3 + 0.01 x attenuator setting) dB
Absolute Amplitude Uncertainty		
Uncertainty	fc=50 MHz, peak detector, preamplifier off, 10 dB RF attenuation, input signal=-10 dBm, 20°C to 30°C	±0.4 dB
RBW Switching Uncertainty		
Uncertainty	10 Hz to 1 MHz, relative to 1 kHz RBW	<0.1 dB

Reference Level		
Range		-100 dBm to +30 dBm, in 1 dB step
Resolution	Log Scale	0.01 dB
	Linear Scale	5 digits

Level Measurement Uncertainty		
Level Measurement Uncertainty	95% confidence level, S/N>20 dB, RBW=VBW=1 kHz, preamplifier off, 10 dB RF attenuation, -50 dBm<reference level<0, 10 MHz<fc<3 GHz, 20 °C to 30 °C	<1.0 dB, nominal

RF Input VSWR		
10 dB RF Attenuation		
VSWR	100 kHz to 10 MHz	<1.8, nominal
	10 MHz to 2.5 GHz	<1.5, nominal
	2.5 GHz to 3 GHz	<1.8, nominal
Intermodulation		
Second Harmonic Intercept (SHI)		+35 dBm
Third-order Intermodulation (TOI)	fc >30 MHz	+7 dBm

Spurious Responses		
Image Frequency		<-60 dBc
Intermediate Frequency		<-60 dBc
Spurious Response, Inherent		<-88 dBm, typical
Spurious Response, Others	Referenced to local oscillators, referenced to A/D conversion, referenced to subharmonic of first LO, referenced to harmonic of first LO	<-60 dBc
Input Related Spurious	Mixer level: -30 dBm	<-60 dBc, typical

## Sweep

Sweep Time Range	100 Hz ≤ Span ≤ 3 GHz Span = 0 Hz	10 ms to 3000 s 20 μs to 3000 s
Sweep Time Uncertainty	100 Hz ≤ Span ≤ 3 GHz Span = 0 Hz	5%, nominal 0.5%, nominal
Sweep Mode		Continuous, single

## Trigger Functions

Trigger		
Trigger Source		Free run, Video, External
External Trigger Level		5V TTL level, nominal

## Tracking Generator (Option for DSA1030A)

TG Output		
Frequency Range		9 kHz to 3 GHz
Output Level		-20 dBm to 0 dBm, in 1 dB steps
Output Flatness	10 MHz to 3 GHz, referenced to 50 MHz	±3 dB

## Inputs and Outputs

RF Input		
Impedance		50 Ω, nominal
Connector		N female

TG out		
Impedance		50 Ω, nominal
Connector		N female

Probe Power		
Voltage/Current		+15 V, <10% at 150 mA -12.6 V, <10% at 150 mA

10MHz REF In / 10 MHz REF Out / External Trigger In		
Connector		BNC female
10 MHz REF Amplitude		0 dBm to 10 dBm
Trigger Voltage		5 V TTL level, nominal

USB		
	USB Host	
Connector		B plug
Protocol		Version2.0
	USB Device	
Connector		A plug
Protocol		Version2.0

VGA		
Connector		VGA compatible, 15-pin mini D-SUB
Resolution		800×600, 60 Hz

## General Specifications

<b>Display</b>		
Type		TFT LCD
Resolution		800×480
Size		8.5"
Colors		65536
<b>Printer Supported</b>		
Protocol		PictBridge
<b>Remote Control</b>		
USB		USB TMC
LAN Interface		10/100 Base-T, RJ-45
IEC/IEEE bus (GPIB)	with opt. USB-GPIB	IEEE488.2
<b>Mass Memory</b>		
Mass Memory		Flash disk (internal), USB Disk (not supplied)
Data Storage Space	Flash disk (internal)	1 G Bytes
<b>Power Supply</b>		
Input Voltage Range, AC		100 V to 240 V, normal
AC supply frequency		45 Hz to 440 Hz
Power Consumption		Typ. 35 W,Max 60 W with all options.
Operation Time at DC Power Supply		About 3 hours
<b>Temperature</b>		
Operating temperature range		5°C to 40°C
Storage temperature range		-20°C to70°C
<b>Dimensions</b>		
	(W × H × D)	399 mm × 223 mm × 159 mm (15.7 inches× 8.78 inches × 6.26 inches),approximate
<b>Weight</b>		
		6.2 kg (13.7 lbs),approximate

## Options and Accessories



Tracking Generator



Rack Mount Kit  
(DSA1000-RMSA)



Front Panel Cover




Soft Carrying Bag(DSA1000-SCBA)



USB to GPIB  
Converter(USB-GPIB)



Desk Mount Instrument Arm(ARM)

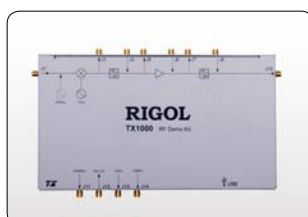

TX1000 (RF Demo Kit)



DSA Accessories Package



Ultra Spectrum

► **DSA Utility Kit include:**

Name	Qty	Description
N-SMA Adapter	1	Female N Connector to Female SMA Connector
75Ω-50Ω Adapter	1	Used to connect the measured system and the spectrum analyzer when the output impedance of the measured system is 75Ω.
BNC-BNC Cable	1	Black coaxial cable one of whose terminals is female BNC connector and the other is male BNC connector.
N-BNC Adapter	1	Male N Connector to Female BNC Connector
N-SMA Cable	1	One of its terminals is female N connector and the other is male SMA connector
Antenna	2	Frequency: 900 MHz /1.8 GHz.
Antenna	2	Frequency: 2.4GHz.

► **Ordering Information**

	Description	Order Number
Model	Spectrum Analyzer, 9 kHz to 3 GHz (with preamplifier)	DSA1030A
Standard Accessories	Front Panel Cover	
	Quick Guide (Hard Copy)	
	CDROM (User Guide, Programming Guide)	
	USB Cable	
	Power Cable	
Options	3 GHz Tracking Generator (for DSA1030A)	DSA1030-TG3
	DSA PC Software	Ultra Spectrum
	USB to GPIB Interface Converter for Instrument	USB-GPIB
Optional Accessories	Rack Mount Kit	DSA1000-RMSA
	RF Demo Kit	TX1000
	DSA Accessories Package	DSA Utility Kit
	Front Panel Cover	DSA1000-FPCS
	Soft Carrying Bag	DSA1000-SCBA
	Desk Mount Instrument Arm	ARM
Orderable Manuals (Hard Copy)	Quick Guide, Chinese	QGD010
	Quick Guide, English	QGD011
	User Guide, Chinese	UGD010
	User Guide, English	UGD011
	Programming Guide, Chinese	PGD010
	Programming Guide, English	PGD011

November,2011

